

QUICKCOLD 120d

HIGH QUALITY, SAFE & SMART COLD
TRANSPORTATION ENABLER.

QUICKCOLD 120

PRODUCT SPECIFICATIONS:

Max. amount of dry-ice:		9.5 kg
External dimensions:	Height	530 mm
	Length	600 mm
	Width	1000 mm
Internal dimensions (chilled / frozen compartment):	Height:	390 mm / 390 mm
	Length:	475 mm / 475 mm
	Width:	425 mm / 225 mm
Total payload:		120-L
Frozen payload:		41 liters for frozen cargo
Chilled payload:		79 liters for chilled cargo
Tare weight:		27 Kg
Max payload weight:		80 Kg
Adjustable chilled temperature range:		-5°C - +6°C
Passive frozen temperature:		< -35°C
Operating time with one dry-ice cartridge:		37h
Pre-cooling:		suggested




+4 °C

+39.2 °F

-18 °C

-0.4 °F

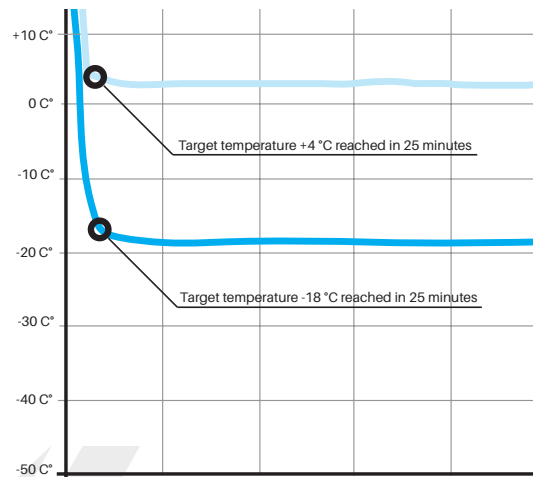

Target temperatures +4 °C and -18 °C were reached in less than 25 minutes without pre-cooling or cargo when ambient +21 °C.



PRODUCT KEY FEATURES:

- 2 separate temperature zones (DualZone)
- GPS/GSM based
 - tracking and route monitoring
 - temperature logging with history
 - remote temperature adjustment
- Optional Iridium satellite connection
- Swappable cold cartridge
- Possibility to use PCM-cartridge instead of dry-ice
- Optimized foot print for Europallet (1000x1200mm)

**FURTHER DETAILS OF OUR
LATEST PRODUCTS ON
WWW.VAKAVA.COM**

**CONTACT US:
INFO@VAKAVA.COM**

