

QUICKCOLD 640d

HIGH QUALITY, SAFE & SMART COLD
TRANSPORTATION ENABLER.

QUICKCOLD 640

PRODUCT SPECIFICATIONS:

Max. amount of dry-ice: 60 kg, min. 30 kg
External dimensions: Height: 1220 mm
Length: 1200 mm
Width: 1000 mm

Internal dimensions (chilled / frozen compartment):
Height: 670 mm / 210 mm
Length: 475 mm / 885 mm
Width: 810 mm / 420 mm

Total payload: 630-L
Frozen payload: 550-L
Chilled payload: 80-L
Tare weight: 99 Kg
Max payload weight: 80 Kg
Adjustable chilled temperature range: -4 °C - +8 °C
Passive frozen temperature: < -35 °C
Operating time with: 4 dry-ice cartridges (=60kg): 65 h
2 dry-ice cartridges (=30kg): 31 h

Pre-cooling: suggested




+4 °C

+39.2 °F

-40 °C

-40 °F

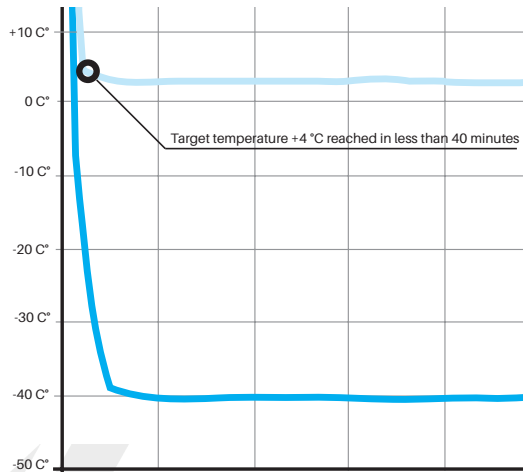

Target temperature +4 °C was reached in less than 40 minutes without pre-cooling or cargo when ambient +20 °C.



PRODUCT KEY FEATURES:

- 2 separate temperature zones (DualZone)
- GPS/GSM based
 - tracking and route monitoring
 - temperature logging with history
 - remote temperature adjustment
- Optional Iridium satellite connection
- Swappable cold cartridge
- Possibility to use PCM-cartridge instead of dry-ice
- Optimized foot print for Europallet (1000x1200mm)

**FURTHER DETAILS OF OUR
LATEST PRODUCTS ON
WWW.VAKAVA.COM**

**CONTACT US:
INFO@VAKAVA.COM**

